


"MV" RANGE H.F. VERTICALS 500 watts

160 MTR COIL
(or lowest band of
each different model
screws into 3/8" adaptor)

MARK 5

6 MTR TUNING
58" to 60"

Approx 18" to 24" above ground

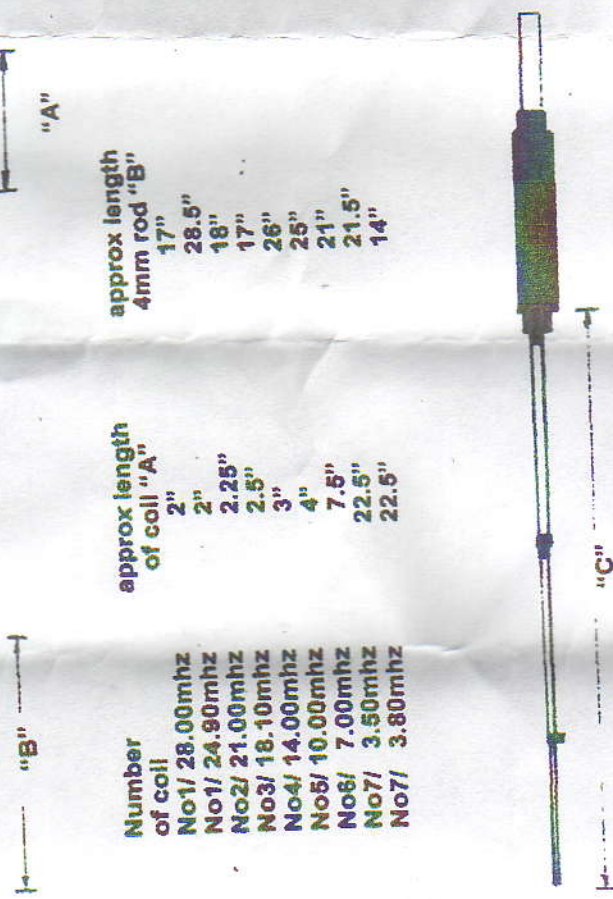

1.8mhz "C" = 104" 2.00 mhz "C" = 80"

Assemble as shown, coils screw into aluminium ring (any order)
160 mtr coil fits into top, or lowest band of other models screw into
3/8" adaptor which fits into top. 6 mtr is tuned with the 2 lower
sections as shown.
Note all measurements are for bottom of each band (centre of
band will be shorter) also measurements may vary with position of
aerial.
Best height approx 18" to 24" above ground plus earth rod
minimum or a few random length radials if possible.

**PLEASE NOTE NO 1 COIL IS FOR EITHER
10 mtrs 4 mm rod 17"
OR 12 mtr " 28.5"
OR CAN BE SET IN BETWEEN (approx 22")
AND RUN THROUGH ATU.**

